



P-Channel 80- and 100-V (D-S) MOSFETs

PRODUCT SUMMARY				
Part Number	$V_{(BR)DSS}$ Min (V)	$r_{DS(on)}$ Max (Ω)	$V_{GS(th)}$ (V)	I_D (A)
VP0808L	-80	5 @ $V_{GS} = -10$ V	-2 to -4.5	-0.28
VP1008L	-100	5 @ $V_{GS} = -10$ V	-2 to -4.5	-0.28

FEATURES


- High-Side Switching
- Low On-Resistance: 2.5 Ω
- Moderate Threshold: -3.4 V
- Fast Switching Speed: 40 ns
- Low Input Capacitance: 75 pF

BENEFITS

- Ease in Driving Switches
- Low Offset (Error) Voltage
- Low-Voltage Operation
- High-Speed Switching
- Easily Driven Without Buffer

APPLICATIONS

- Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Memories, Transistors, etc.
- Battery Operated Systems
- Power Supply, Converter Circuits
- Motor Control

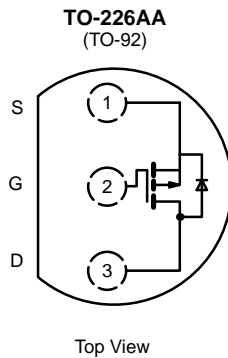

VP0808L
Device Marking
Front View



"S" = Siliconix Logo
xxyy = Date Code

VP1008L
Device Marking
Front View



"S" = Siliconix Logo
xxyy = Date Code

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)				
Parameter	Symbol	VP0808L	VP1008L	Unit
Drain-Source Voltage	V_{DS}	-80	-100	V
Gate-Source Voltage	V_{GS}	± 30	± 30	
Continuous Drain Current ($T_J = 150^\circ\text{C}$)	$T_A = 25^\circ\text{C}$	-0.28	-0.28	A
	$T_A = 100^\circ\text{C}$	-0.17	-0.17	
Pulsed Drain Current ^a	I_{DM}	-3	-3	
Power Dissipation	$T_A = 25^\circ\text{C}$	0.8	0.8	W
	$T_A = 100^\circ\text{C}$	0.32	0.32	
Thermal Resistance, Junction-to-Ambient	R_{thJA}	156	156	$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150		$^\circ\text{C}$

Notes

a. Pulse width limited by maximum junction temperature.

SPECIFICATIONS (T _A = 25 °C UNLESS OTHERWISE NOTED)								
Parameter	Symbol	Test Conditions	Typ ^a	Limits				Unit
				VP0808L		VP1008L		
				Min	Max	Min	Max	
Static								
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = -10 μA	-110	-80		-100		V
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -1 mA	-3.4	-2	-4.5	-2	-4.5	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V T _J = 125 °C			±100		±100	nA
					±500		±500	
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -80 V, V _{GS} = 0 V T _J = 125 °C			-10			μA
					-500			
							-10	
		V _{DS} = -100 V, V _{GS} = 0 V T _J = 125 °C					-500	
On-State Drain Current ^b	I _{D(on)}	V _{DS} = -15 V, V _{GS} = -10 V	-2	-1.1		-1.1		A
Drain-Source On-Resistance ^b	r _{DS(on)}	V _{GS} = -10 V, I _D = -1 A T _J = 125 °C	2.5		5		5	Ω
			4.4		8		8	
Forward Transconductance ^b	g _{fs}	V _{DS} = -10 V, I _D = -0.5 A	325	200		200		mS
Common Source Output Conductance ^b	g _{os}	V _{DS} = -7.5 V, I _D = -0.1 A	0.45					
Dynamic								
Input Capacitance	C _{iss}	V _{DS} = -25 V, V _{GS} = 0 V f = 1 MHz	75		150		150	pF
Output Capacitance	C _{oss}		40		60		60	
Reverse Transfer Capacitance	C _{rss}		18		25		25	
Switching^c								
Turn-On Time	t _{d(on)}	V _{DD} = -25 V, R _L = 47 Ω I _D ≅ -0.5 A, V _{GEN} = -10 V R _G = 25 Ω	11		15		15	ns
	t _r		30		40		40	
Turn-Off Time	t _{d(off)}		20		30		30	
	t _f		20		30		30	







Notes

- a. For DESIGN AID ONLY, not subject to production testing.
- b. Pulse test: PW ≤ 300 μs duty cycle ≤ 2%.
- c. Switching time is essentially independent of operating temperature.






VPDV10



TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

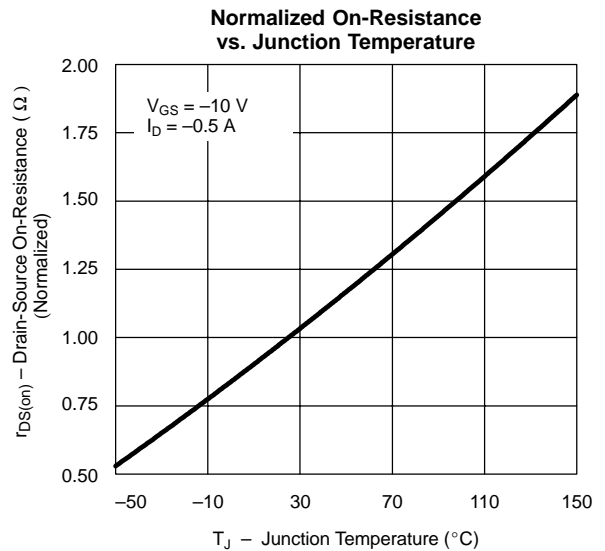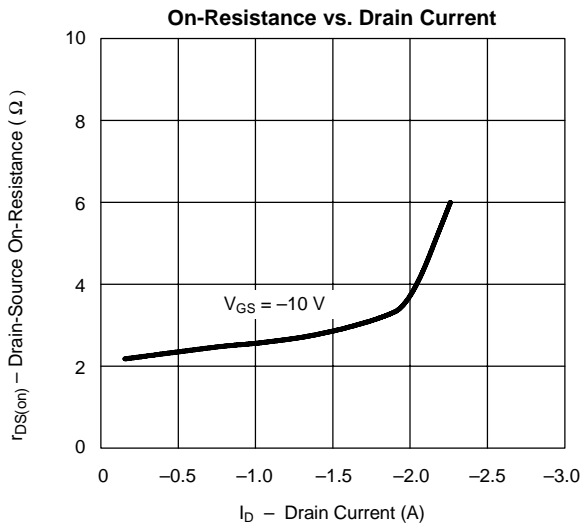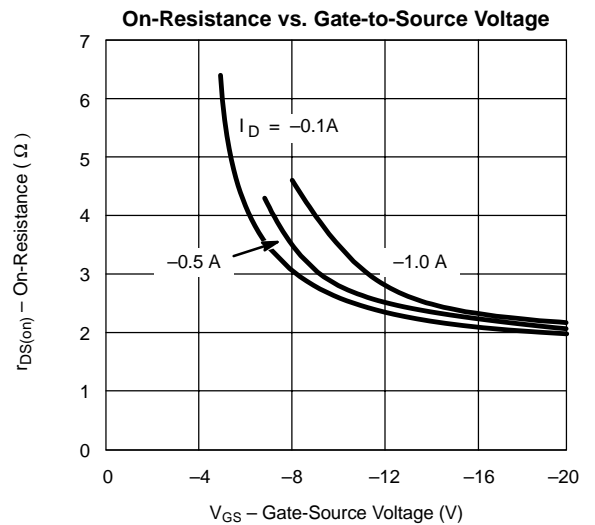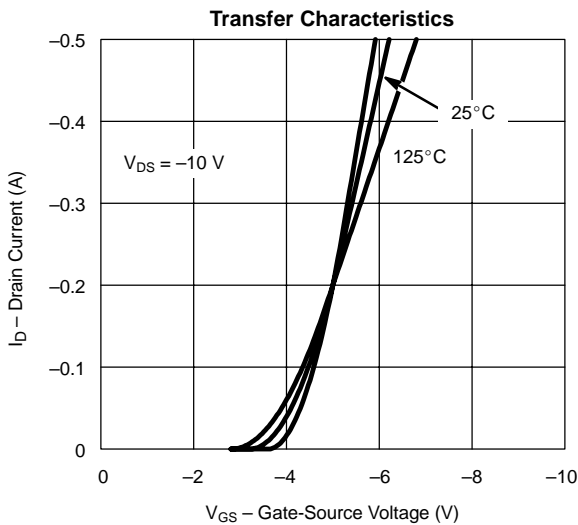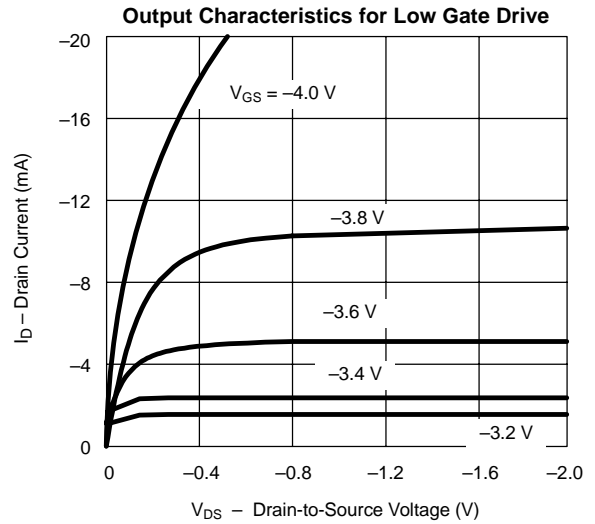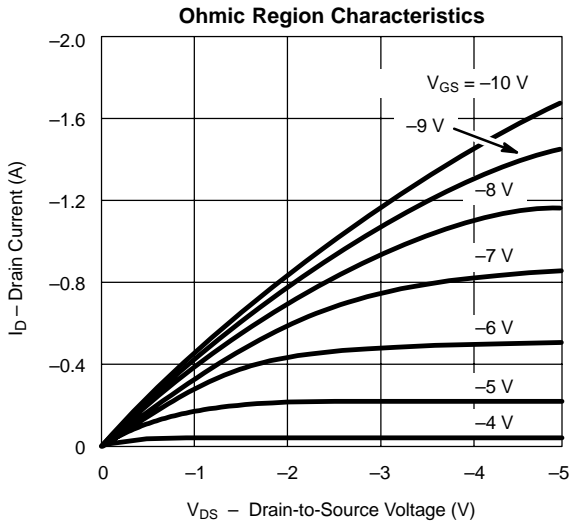

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

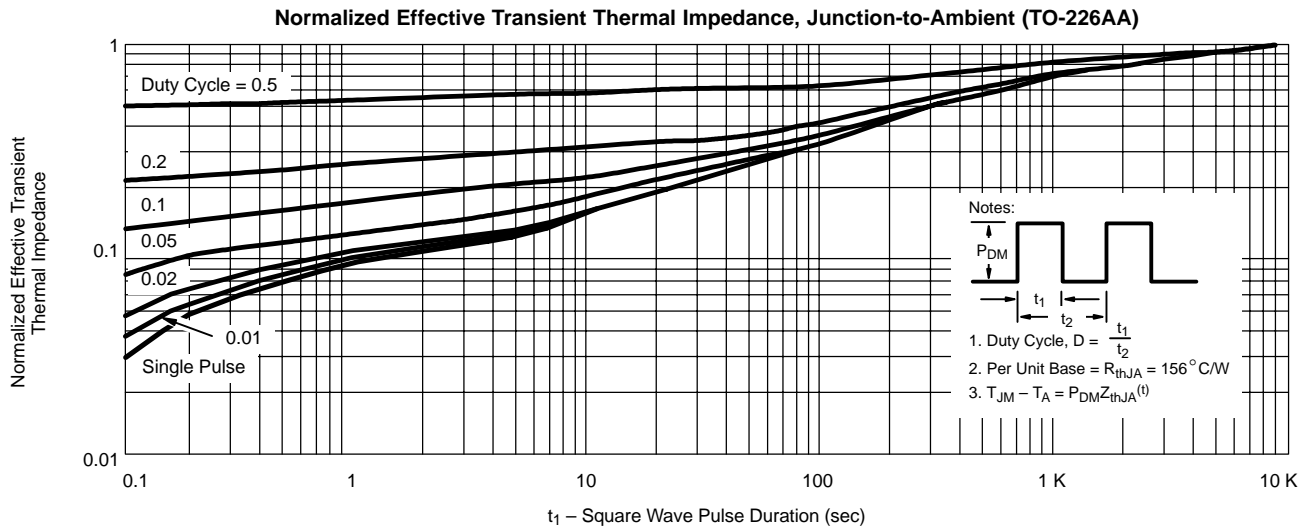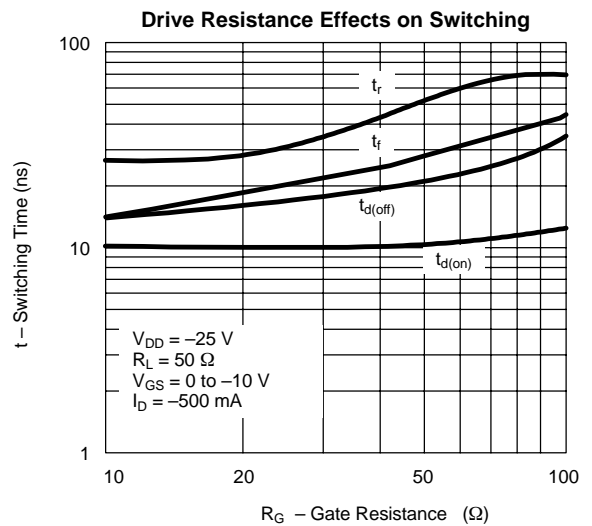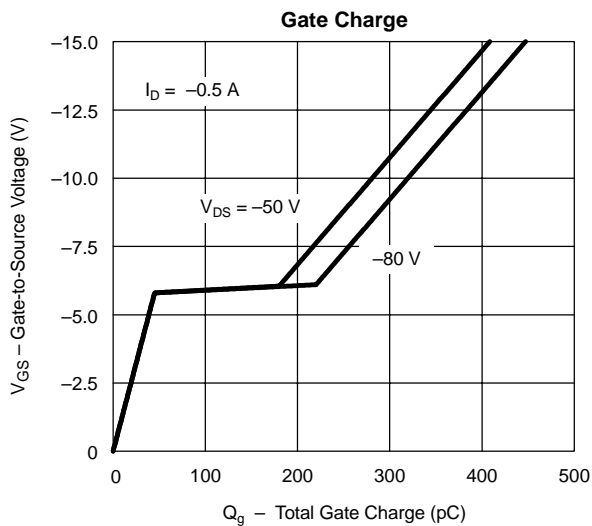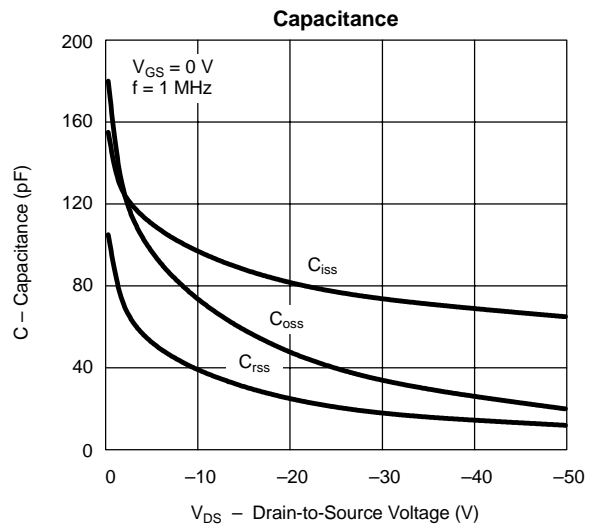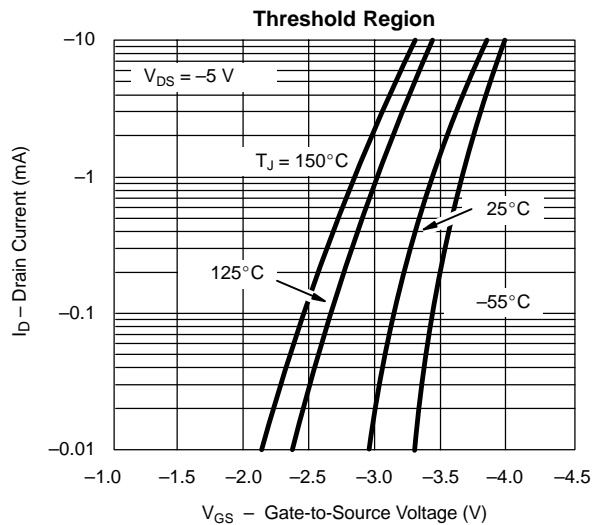



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.