



## Features

- Low current consumption - high sound pressure
- Compact, light design
- High reliability and no contact noise
- Easy-mounting
- Wide variety of tones can be made by cavity designing
- Functions over a wide range of Input voltage

## Applications

- Confirmation Tone for Various Office Automation Equipment
- Automobiles, Microwave Ovens, Refrigerators
- Clocks, Toys, Game Machines


## How to Order

**KBS - 27 DB - 3 A**  
 ① ② ③ ④ ⑤

- ① Series
- ② Diameter (mm)
- ③ Appearance (Buzzer with Casing)
- ④ Resonant Frequency
- ⑤ Type of Terminals  
 (A: With Lead, P: Round Pin)

## Dimensions

(Unit: mm)

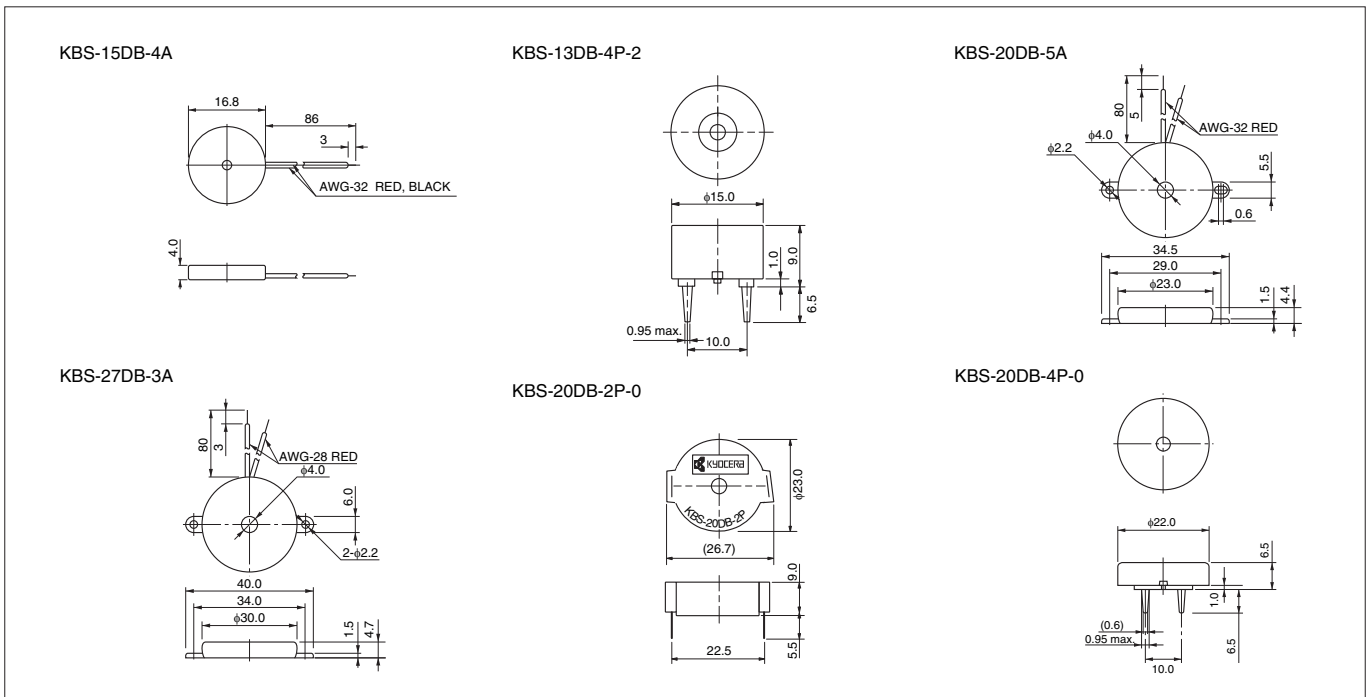

## Specifications

| Part Number   | Sound Pressure Level              | Capacitance |
|---------------|-----------------------------------|-------------|
| KBS-13DB-4P-2 | 73dB min. 4.096kHz 10Vp-p SQ 30cm | 10nF±30%    |
| KBS-20DB-2P-0 | 75dB min. 2.048kHz 10Vp-p SQ 30cm | 24nF±30%    |
| KBS-20DB-4P-0 | 77dB min. 4.096kHz 10Vp-p SQ 30cm | 14nF±30%    |
| KBS-15DB-4A   | 72dB min. 4.096kHz 10Vp-p SQ 30cm | 9.5nF±30%   |
| KBS-20DB-5A   | 75dB min. 5.0 kHz 10Vp-p SQ 30cm  | 10nF±30%    |
| KBS-27DB-3A   | 75dB min. 3.0 kHz 10Vp-p SQ 30cm  | 20nF±30%    |